

## Controller SBRD-Q

**FESTO**



## Key features

### Functional principle

The images taken by the remote camera heads are sent to the electronic evaluation unit. Here, different inspection features are calculated, such as length, height, area, centre of mass, grey or colour value and roundness, depending on the application task.

By scanning various sample parts when setting up the camera, tolerance ranges for good parts are determined for each inspection feature. During operation, the camera computes characteristic values for the part to be inspected. Depending on whether these are within or outside the programmed tolerance range, the part is identified as good or bad. The results from the calculation of the characteristics can also be transmitted to a PLC via Ethernet, PROFINET, Telnet or EtherNet/IP.

Up to 256 inspection programs can be stored on the camera.

The characteristics calculated by the camera are not dependent on the angular orientation and position of the inspection part; they are determined relative to the position of the inspection part and so any tilting and/or movement of the inspection part in the field of view is irrelevant for the inspection process. The behaviour of the camera during inspection is determined by what is called the evaluation mode. There are two different modes.


- Triggered: single image recording and inspection with each trigger signal (image evaluation is triggered by an external signal)
- Free run: continuous image recording and inspection (without fixed frame rate) as long as there is a trigger signal.

### Areas of application


- Detecting the position and rotary orientation of parts
- Pick & place
- Quality inspection
- Measurement
- Reading of barcodes and data matrix codes (1D and 2D codes)
- Reading plain text (OCR)

### Application examples

Roller alignment

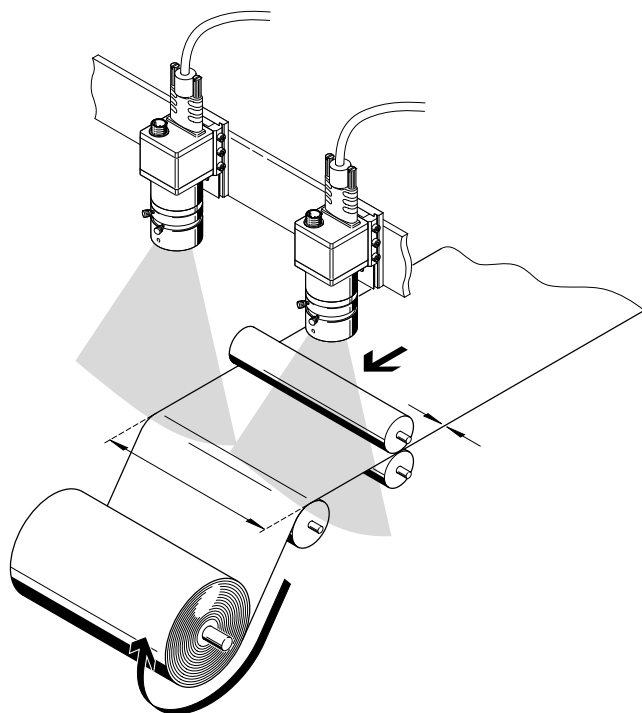


Measuring

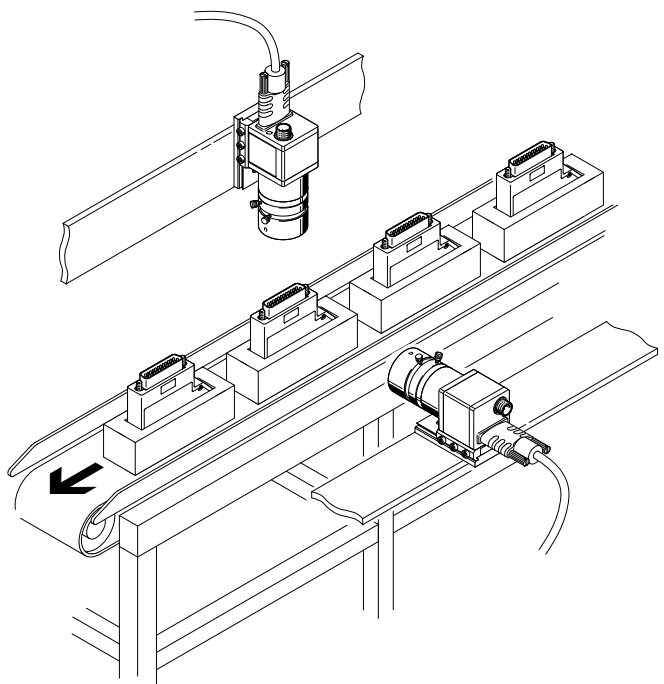


## Key features

### Application examples


#### Screws

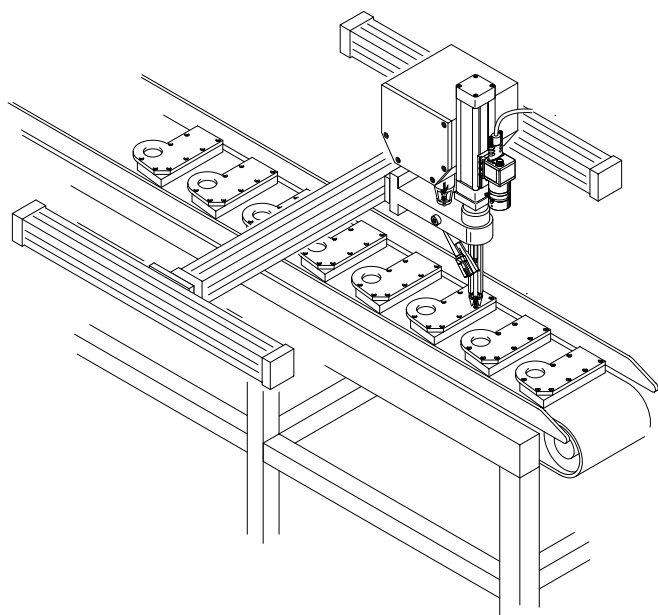


#### Pick & place

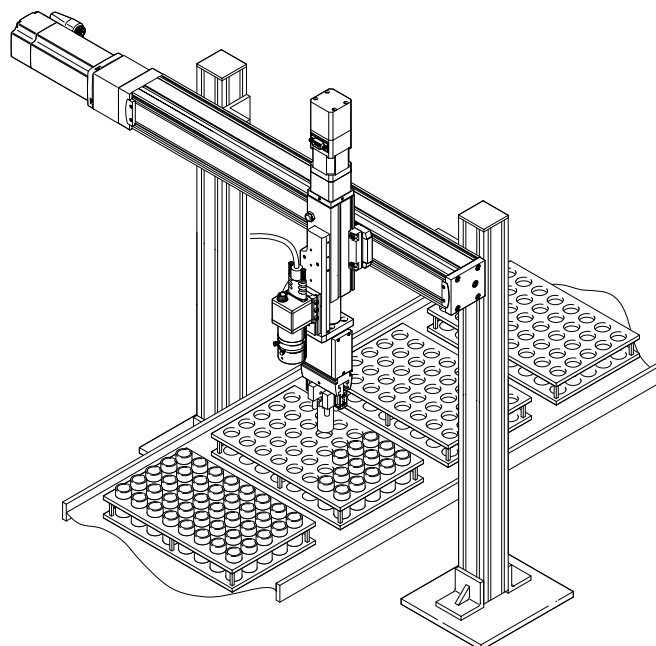


#### Bonding

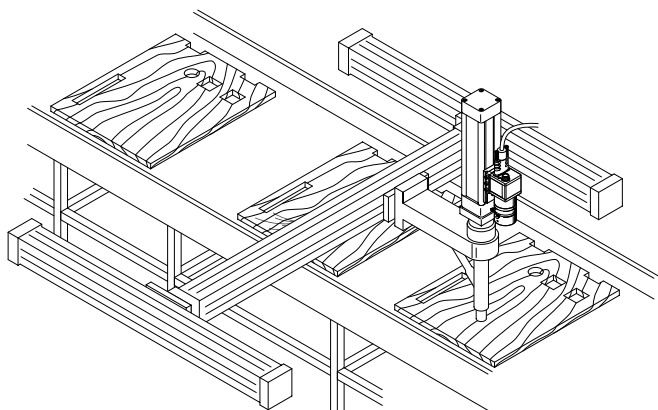

#### Sorting screws

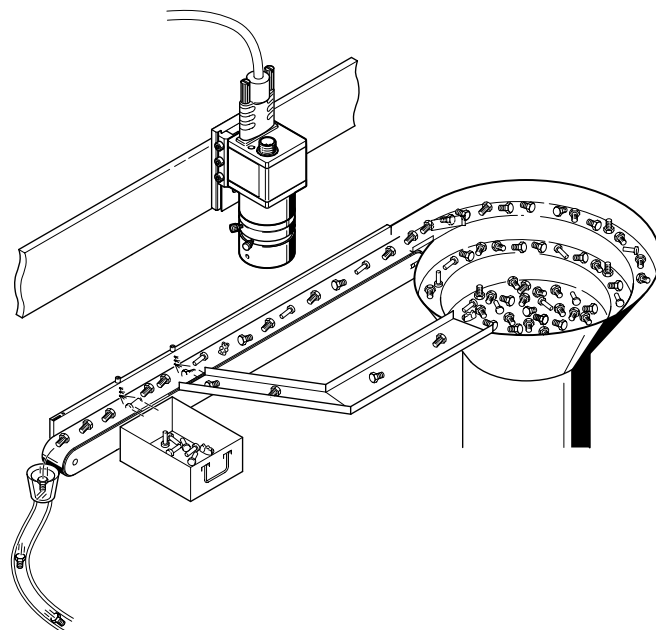

Peripherals overview

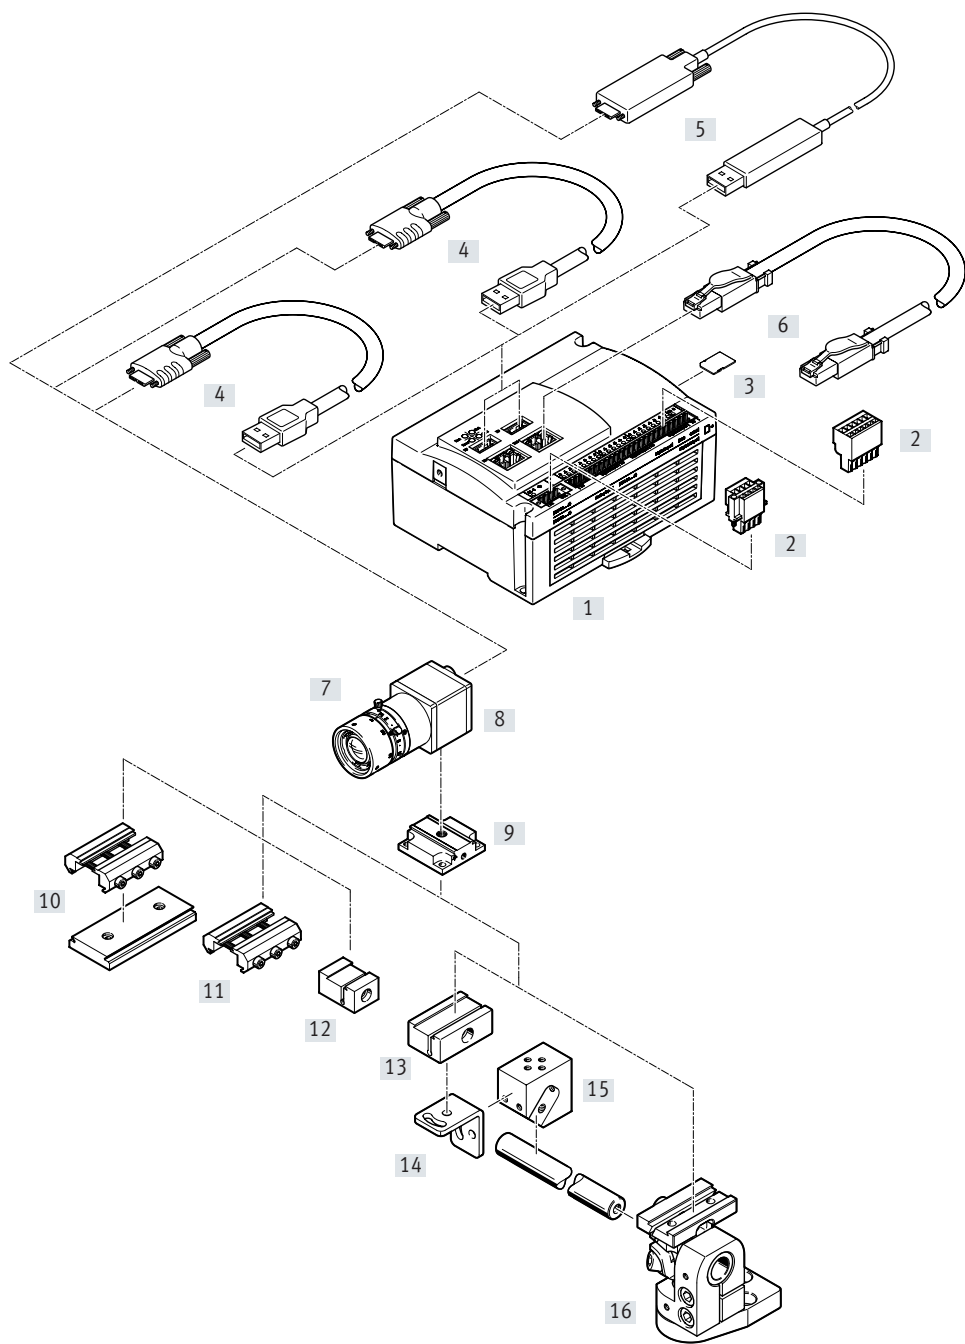

| Accessories |                                                |  | → Page | Accessories |                             |  | → Page |
|-------------|------------------------------------------------|--|--------|-------------|-----------------------------|--|--------|
| [1]         | Controller SBRD-Q                              |  | 7      | [10]        | Adapter kit SBOA-HMSV-39    |  | 13     |
| [2]         | Plug NECC-L2G...                               |  | 17     | [11]        | Adapter kit SBOA-HMSV-40    |  | 13     |
| [3]         | Memory card CAMC-M-MS-G32                      |  | 17     | [12]        | Adapter kit SBOA-HMSV-41    |  | 13     |
| [4]         | Connecting cable<br>NEBC-U7G10-KS-5-N-S-U5G9   |  | 17     | [13]        | Mounting SBAM-C6-CP         |  | 14     |
| [5]         | Connecting cable<br>NEBC-U7G10-EH-....N-S-U5G9 |  | 17     | [14]        | Mounting bracket SBAM-C6-A  |  | 16     |
| [6]         | Connecting cable<br>NEBC-R3G4-ES-1-S-R3G4-ET   |  | 17     | [15]        | Mounting SBAM-C6-CP-AF      |  | 15     |
| [7]         | Camera head SBPB-R2...                         |  | 10     | [16]        | Swivel mounting SBAM-C6-... |  | 14     |
| [8]         | Lens SASF-C-L-...                              |  | 12     |             |                             |  |        |
| [9]         | Mounting SBAM-C11-CP                           |  | 12     |             |                             |  |        |

## Type codes – Controller

| 001  | Series     | 002 | Function     |
|------|------------|-----|--------------|
| SBRD | Controller | Q   | Quality test |

Type codes – Camera head

|      |              |  |
|------|--------------|--|
| 001  | Series       |  |
| SBPB | Camera head  |  |
| 002  | Resolution   |  |
| R2   | 1280x1024    |  |
| R5   | 1600x1200    |  |
| R9   | 2456x2054    |  |
| 003  | Image sensor |  |
| B    | Monochrome   |  |
| C    | Colour       |  |

|     |                         |  |
|-----|-------------------------|--|
| 004 | Communication interface |  |
| U3  | USB 3.0                 |  |
| 005 | Digital inputs          |  |
| 1E  | 1 input                 |  |
| 006 | Digital outputs         |  |
| 1A  | 1 output                |  |
| 007 | Lens connection         |  |
| C   | C mount                 |  |

## Data sheet


-  - Temperature range  
-5 ... 50°C



## General technical data

|                                                |      |                                              |
|------------------------------------------------|------|----------------------------------------------|
| Dimensions W x H x L                           | [mm] | 130 x 106 x 60                               |
| Type of mounting                               |      | Via through-hole for M4 screw<br>With H-rail |
| Product weight                                 | [g]  | 315                                          |
| CE marking (see declaration of conformity)     |      | To EU EMC Directive                          |
| KC mark                                        |      | KC EMC                                       |
| Protection against direct and indirect contact |      | PELV                                         |
| Nominal operating voltage DC                   | [V]  | 24                                           |
| Permissible voltage fluctuations               | [%]  | ±10                                          |
| Power consumption 24 V                         | [W]  | 20                                           |

## Input/output interface

|                                 |      |                                                                                                            |
|---------------------------------|------|------------------------------------------------------------------------------------------------------------|
| Function                        |      | 10x digital input<br>2x digital input with pull-up resistor<br>8x digital output<br>Ground<br>Power supply |
| Connection type                 |      | Plug                                                                                                       |
| Connection technology           | [mm] | Board connector, contact spacing 3.5 mm                                                                    |
| Number of pins/wires            |      | 24                                                                                                         |
| Plug pattern                    |      |                        |
| Number of inputs                |      | 12                                                                                                         |
| Note on inputs                  |      | 2 of the 12 inputs with integrated pull-up resistor                                                        |
| Switching level                 | [V]  | Signal 1: $\geq 10$<br>Signal 0: $\leq 1$                                                                  |
| Note on the switching level     | [V]  | Signal 0: $\leq 1$<br>Signal 1: $\geq 8$<br>For integrated pull-up resistor                                |
| Switching logic at inputs       |      | PNP (positive switching)                                                                                   |
| Number of outputs               |      | 8                                                                                                          |
| Digital outputs, output current | [mA] | 450                                                                                                        |
| Max. output current             | [mA] | 1510                                                                                                       |
| Switching logic at outputs      |      | PNP (positive switching)                                                                                   |


## Data sheet

|                                        |                                                                                                                                                                                                                                                                                                                    |                                         |
|----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|
| Power supply                           |                                                                                                                                                                                                                                                                                                                    |                                         |
| Function                               | Electronics                                                                                                                                                                                                                                                                                                        |                                         |
| Connection type                        | Plug                                                                                                                                                                                                                                                                                                               |                                         |
| Connection technology                  | [mm]                                                                                                                                                                                                                                                                                                               | Board connector, contact spacing 3.5 mm |
| Number of pins/wires                   | 4                                                                                                                                                                                                                                                                                                                  |                                         |
| Plug pattern                           | <div>1<div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div>24</div>       |                                         |
| Camera interface                       |                                                                                                                                                                                                                                                                                                                    |                                         |
| Function                               | Communication with camera only                                                                                                                                                                                                                                                                                     |                                         |
| Connection type                        | 2x socket                                                                                                                                                                                                                                                                                                          |                                         |
| Connection technology                  | USB 3.0 type A                                                                                                                                                                                                                                                                                                     |                                         |
| Number of pins/wires                   | 9                                                                                                                                                                                                                                                                                                                  |                                         |
| Note on the camera interface           | Only use the cables explicitly identified by Festo as accessories                                                                                                                                                                                                                                                  |                                         |
| Plug pattern                           | <div>98765<div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div>1234</div> |                                         |
| Fieldbus interface                     |                                                                                                                                                                                                                                                                                                                    |                                         |
| Function                               | No function                                                                                                                                                                                                                                                                                                        |                                         |
| Card slot                              |                                                                                                                                                                                                                                                                                                                    |                                         |
| Storage medium                         | microSD                                                                                                                                                                                                                                                                                                            |                                         |
| Storage capacity                       | ≤ 32 GB                                                                                                                                                                                                                                                                                                            |                                         |
| Immission/emission                     |                                                                                                                                                                                                                                                                                                                    |                                         |
| Storage temperature                    | [°C]                                                                                                                                                                                                                                                                                                               | −20 ... +70                             |
| Degree of protection                   | IP20                                                                                                                                                                                                                                                                                                               |                                         |
| Ambient temperature                    | [°C]                                                                                                                                                                                                                                                                                                               | −5 ... +50                              |
| Relative humidity                      | [%]                                                                                                                                                                                                                                                                                                                | 95                                      |
|                                        | Non-condensing                                                                                                                                                                                                                                                                                                     |                                         |
| Ethernet interface                     |                                                                                                                                                                                                                                                                                                                    |                                         |
| Protocol                               | TCP/IP                                                                                                                                                                                                                                                                                                             |                                         |
| Function                               | Diagnostics<br>Programming                                                                                                                                                                                                                                                                                         |                                         |
| Connection type                        | Socket                                                                                                                                                                                                                                                                                                             |                                         |
| Connection technology                  | RJ45                                                                                                                                                                                                                                                                                                               |                                         |
| Number of pins/wires                   | 8                                                                                                                                                                                                                                                                                                                  |                                         |
| Transmission rate                      | [Mbps]                                                                                                                                                                                                                                                                                                             | 10                                      |
|                                        | [Mbps]                                                                                                                                                                                                                                                                                                             | 100                                     |
|                                        | [Mbps]                                                                                                                                                                                                                                                                                                             | 1000                                    |
| Plug pattern                           | <div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div> <div>87654321</div> |                                         |
| Operating and environmental conditions |                                                                                                                                                                                                                                                                                                                    |                                         |
| Housing material                       | Reinforced PA                                                                                                                                                                                                                                                                                                      |                                         |
| Note on materials                      | RoHS-compliant                                                                                                                                                                                                                                                                                                     |                                         |

Data sheet


Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)

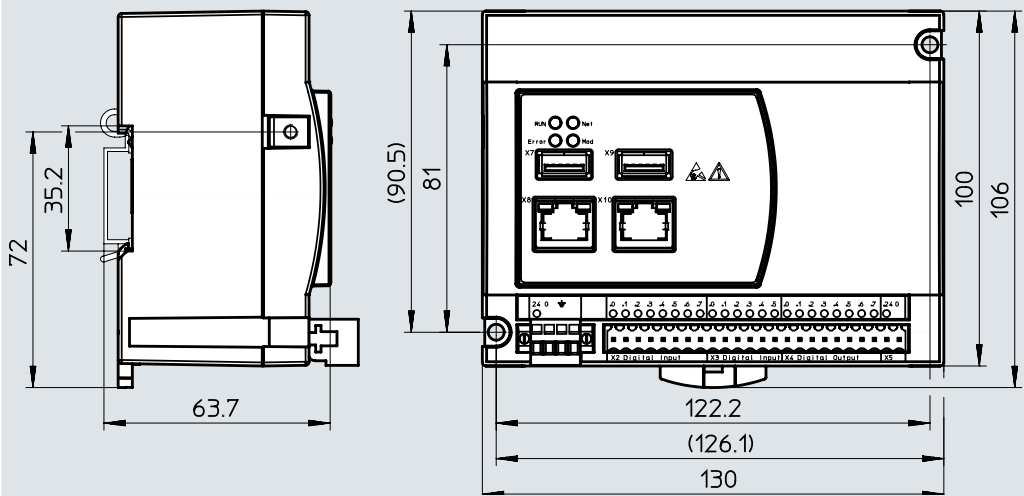

| Type   | B1   | D1<br>Ø | H1  | H2  | H3   | H4 | H5 | H6   | L1  | L2    | L3    |
|--------|------|---------|-----|-----|------|----|----|------|-----|-------|-------|
| SBRD-Q | 63.7 | 4.5     | 106 | 100 | 90.5 | 81 | 72 | 35.2 | 130 | 126.1 | 122.2 |

Ordering data

| Controller                                                                          | Part no. | Type   |
|-------------------------------------------------------------------------------------|----------|--------|
|  | 8067301  | SBRD-Q |

## Accessories – Ordering data

-  - Voltage  
5 V
-  - Temperature range  
0 ... 40°C

**General technical data**

|                                            |      |                               |
|--------------------------------------------|------|-------------------------------|
| Sensor resolution                          | -R2  | 1280 x 1024 pixels (SXGA)     |
|                                            | -R5  | 1600 x 1200 pixels (UXGA)     |
|                                            | -R9  | 2456 x 2054 pixels (5MPix)    |
| Sensor type                                | -B   | Monochrome                    |
|                                            | -C   | Colour                        |
| Lens mounting                              |      | C mount                       |
| Field of view                              | [mm] | Depends on the lens chosen    |
| Width                                      | [mm] | 29                            |
| Height                                     | [mm] | 29                            |
| Length                                     | [mm] | 49                            |
| Type of mounting                           |      | Via through-hole for M3 screw |
| Product weight                             | [g]  | 52                            |
| CE marking (see declaration of conformity) |      | To EU EMC Directive           |

**USB interface**

|                                  |                      |             |
|----------------------------------|----------------------|-------------|
| Function                         | Power supply         |             |
|                                  | Communication        |             |
| Connection type                  | Socket               |             |
| Connection technology            | USB 3.0 type B micro |             |
| Number of pins/wires             | 10                   |             |
| Nominal operating voltage DC     | [V]                  | 5           |
| Permissible voltage fluctuations | [%]                  | +/- 5       |
| Electrical power consumption     | -R2 [W]              | 1.3 ... 1.5 |
|                                  | -R5 [W]              | 1.3 ... 1.5 |
|                                  | -R9 [W]              | 2.3 ... 3   |

**Input/output interface**

|          |             |
|----------|-------------|
| Function | No function |
|----------|-------------|

**Immission/emission**

|                      |                          |             |
|----------------------|--------------------------|-------------|
| Degree of protection | IP30 in assembled status |             |
| Storage temperature  | [°C]                     | -20 ... +60 |
| Ambient temperature  | [°C]                     | 0 ... +40   |

**Electronics**

|                  |      |                            |
|------------------|------|----------------------------|
| Working distance | [mm] | Depends on the lens chosen |
| Exposure time    | -R2  | 9 µs - 2000 ms             |
|                  | -R5  | 20 µs - 10000 ms           |
|                  | -R9  | 27 µs - 999 ms             |


## Accessories – Ordering data

| Operating and environmental conditions |                                              |
|----------------------------------------|----------------------------------------------|
| Ambient conditions                     | Screened from extreme external light sources |
|                                        | Cleanest possible ambient air                |
|                                        | Dry                                          |
| Relative humidity                      | [%] 20 ... 80                                |
| Housing material                       | Anodised wrought aluminium alloy             |
| Note on materials                      | RoHS-compliant                               |

## Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)

SBPB-R...-U3-1E1A-C

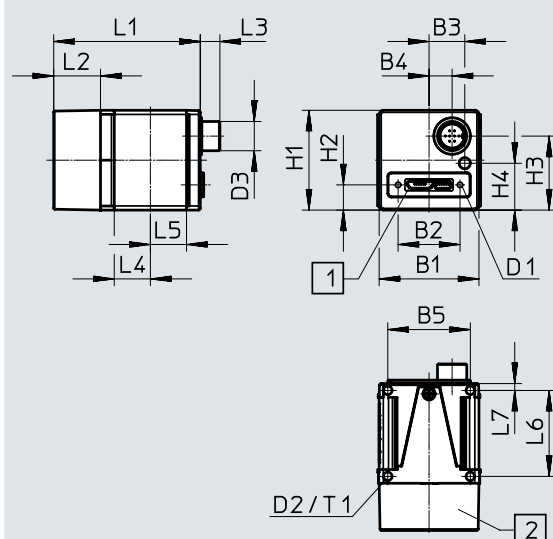

[1] USB 3.0 micro connection

[2] Protective cap

| Type                  | B1 | B2 | B3   | B4  | B5 | D1   | D2 | D3<br>Ø | H1 | H2  |
|-----------------------|----|----|------|-----|----|------|----|---------|----|-----|
| SBPB-R ... -U3-1E1A-C | 29 | 18 | 10.4 | 6.7 | 24 | M2x4 | M3 | 8.5     | 29 | 7.3 |

| Type                  | H3   | H4   | L1   | L2   | L3  | L4   | L5   | L6 | L7 | T1  |
|-----------------------|------|------|------|------|-----|------|------|----|----|-----|
| SBPB-R ... -U3-1E1A-C | 21.5 | 13.6 | 42.6 | 13.6 | 5.7 | 10.5 | 10.5 | 25 | 2  | 3.5 |

## Ordering data – Camera head

|  | Sensor resolution          | Exposure time    | Frame rate (full image)<br>[fps] | Part no. | Type               |
|--|----------------------------|------------------|----------------------------------|----------|--------------------|
|  | 1280 x 1024 pixels (SXGA)  | 9 µs - 2000 ms   | 60                               | 8066466  | SBPB-R2B-U3-1E1A-C |
|  |                            |                  | 60                               | 8066467  | SBPB-R2C-U3-1E1A-C |
|  | 1600 x 1200 pixels (UXGA)  | 20 µs - 10000 ms | 60                               | 8066468  | SBPB-R5B-U3-1E1A-C |
|  |                            |                  | 60                               | 8066469  | SBPB-R5C-U3-1E1A-C |
|  | 2456 x 2054 pixels (5MPix) | 27 µs - 999 ms   | 36                               | 8066470  | SBPB-R9B-U3-1E1A-C |
|  |                            |                  | 36                               | 8066471  | SBPB-R9C-U3-1E1A-C |


## Accessories – Ordering data

| Ordering data – Lenses                                                           |                  |                          |                      |          | Data sheets → Internet: sasf-c |
|----------------------------------------------------------------------------------|------------------|--------------------------|----------------------|----------|--------------------------------|
|                                                                                  | Format<br>[inch] | Working distance<br>[mm] | Focal length<br>[mm] | Part no. | Type                           |
|  | 1/2              | ≥250                     | 12                   | 572911   | SASF-C-L-F12                   |
|                                                                                  | 2/3              | ≥350                     | 35                   | 572914   | SASF-C-L-F35                   |


**Mounting SBAM-C11-CP**

Type of mounting: Clamped with thread  
Material: Anodised wrought aluminium alloy

Note on materials:  
RoHS-compliant

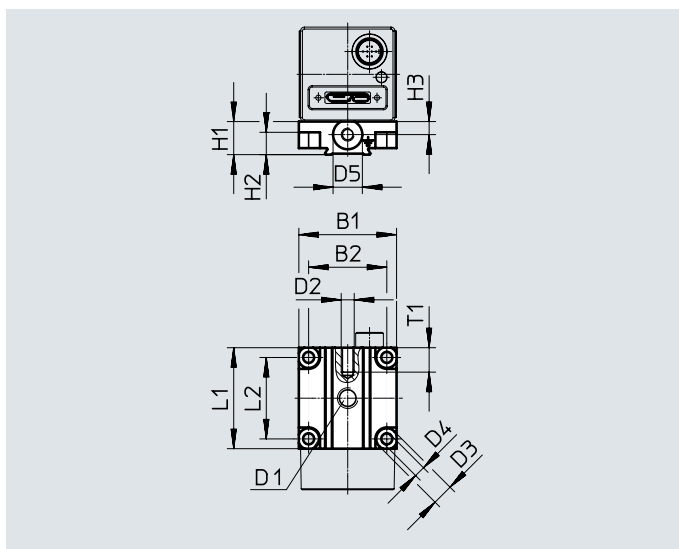

| Type        | B1 | B2 | D1         | D2 | D3<br>Ø | D4<br>Ø | D5<br>Ø | H1<br>-0.2 | H2  | H3 | L1 | L2 | T1  |
|-------------|----|----|------------|----|---------|---------|---------|------------|-----|----|----|----|-----|
| SBAM-C11-CP | 30 | 24 | 1/4-20 UNC | M4 | 6.5     | 3.4     | 9       | 10.2       | 6.9 | 4  | 31 | 25 | 7.5 |

| Ordering data                                                                      |  | Weight<br>[g] | Part no. | Type        |
|------------------------------------------------------------------------------------|--|---------------|----------|-------------|
| Mounting                                                                           |  |               |          |             |
|  |  | 19            | 8066474  | SBAM-C11-CP |

## Accessories – Ordering data


### Adapter kit

#### SBOA-HMSV-39

With screw-on adapter plate

Material:

Anodised wrought aluminium alloy

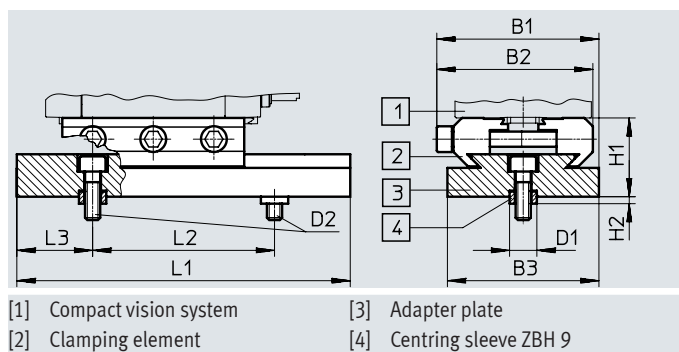

| Ordering data |          |              |
|---------------|----------|--------------|
|               | Part no. | Type         |
| Adapter kit   | 541599   | SBOA-HMSV-39 |


### Adapter kit

#### SBOA-HMSV-40

Without screw-on adapter plate

Material:

Anodised wrought aluminium alloy

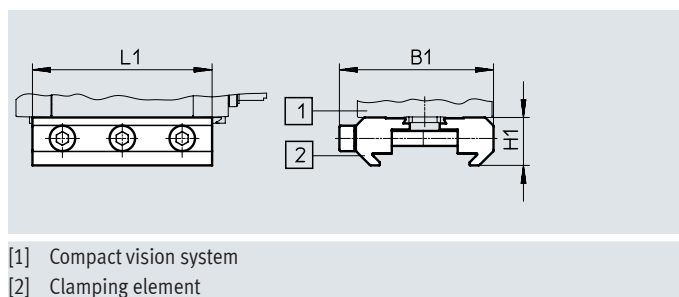

| Ordering data |          |              |
|---------------|----------|--------------|
|               | Part no. | Type         |
| Adapter kit   | 541600   | SBOA-HMSV-40 |


### Adapter kit

#### SBOA-HMSV-41

With female thread G1/4 for mounting on commercially available tripods

Material:

Anodised wrought aluminium alloy

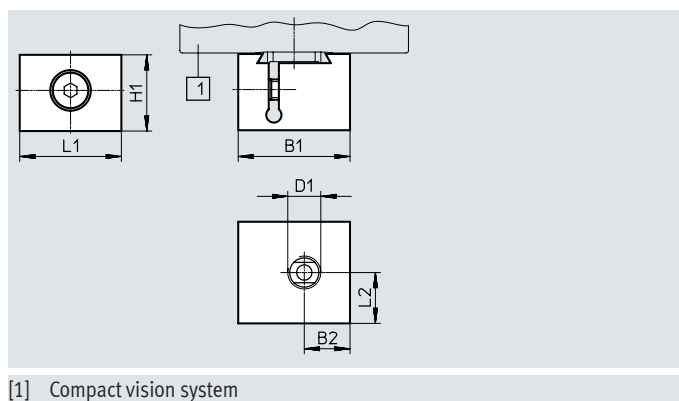

| Ordering data |          |              |
|---------------|----------|--------------|
|               | Part no. | Type         |
| Adapter kit   | 542140   | SBOA-HMSV-41 |

Accessories – Ordering data


Swivel mounting

SBAM-C6-...

Type of mounting: With dovetail slot, with through-hole

Information on materials: Anodised wrought aluminium alloy

Note on materials: RoHS-compliant

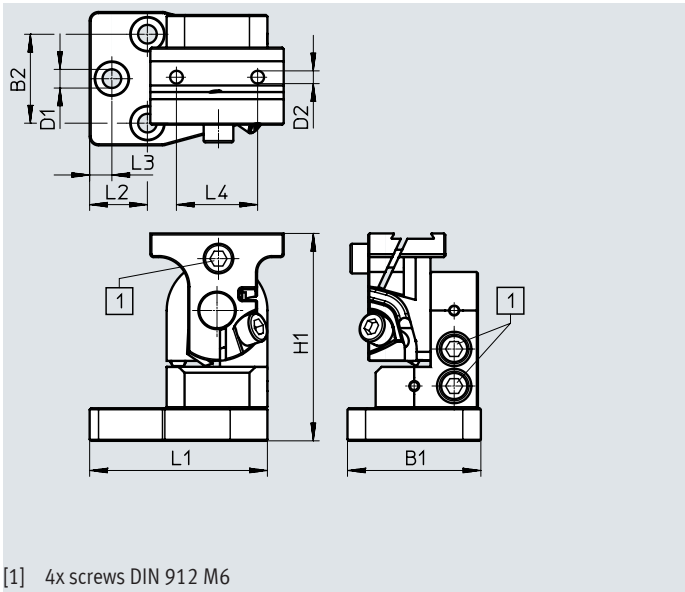

| Dimensions [mm] and ordering data |    |         |         |    |      |      |     |      |               |          |               |
|-----------------------------------|----|---------|---------|----|------|------|-----|------|---------------|----------|---------------|
| B1                                | B2 | D1<br>ø | D2<br>ø | H1 | L1   | L2   | L3  | L4   | Weight<br>[g] | Part no. | Type          |
| 45                                | 30 | 6.3     | 4.3     | 70 | 65.5 | 19.5 | 7.5 | 27.4 | 209           | 8058739  | SBAM-C6-A2-AF |
|                                   |    |         |         |    |      |      |     |      | 28            | 8058740  | SBAM-C6-CP-AF |


Mounting

SBAM-C6-CP

Type of mounting: With dovetail slot, with thread

Information on materials: Anodised aluminium

Note on materials: RoHS-compliant

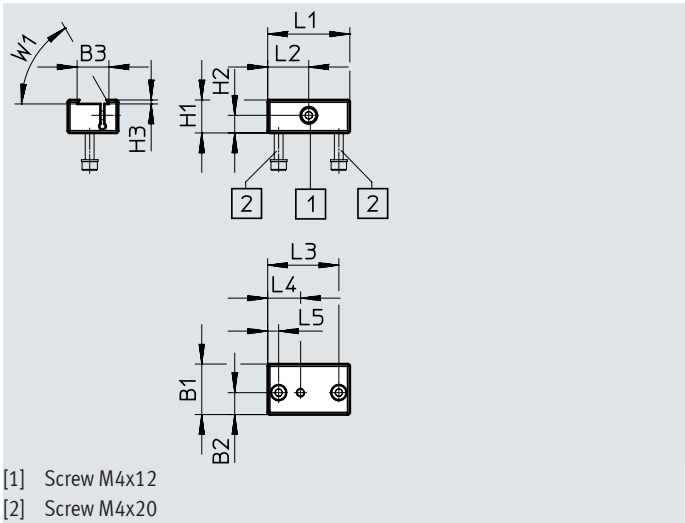

| Dimensions [mm] and ordering data |    |      |    |    |     |      |      |      |    |    |     |               |                   |          |            |
|-----------------------------------|----|------|----|----|-----|------|------|------|----|----|-----|---------------|-------------------|----------|------------|
| B1                                | B2 | B3   | H1 | H2 | H3  | L1   | L2   | L3   | L4 | L5 | W1  | Weight<br>[g] | CRC <sup>1)</sup> | Part no. | Type       |
| 23                                | 10 | 14.5 | 15 | 8  | 1.8 | 37.4 | 18.7 | 32.4 | 15 | 5  | 60° | 28            | 2                 | 8031376  | SBAM-C6-CP |

1) Corrosion resistance class CRC 2 to Festo standard FN 940070  
Moderate corrosion stress. Indoor applications in which condensation can occur. External visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment.

## Accessories – Ordering data



### Mounting

#### SBAM-C6-CP-AF

Type of mounting: With thread,  
clamped

Information on materials: Anodised  
wrought aluminium alloy

Note on materials: RoHS-compliant

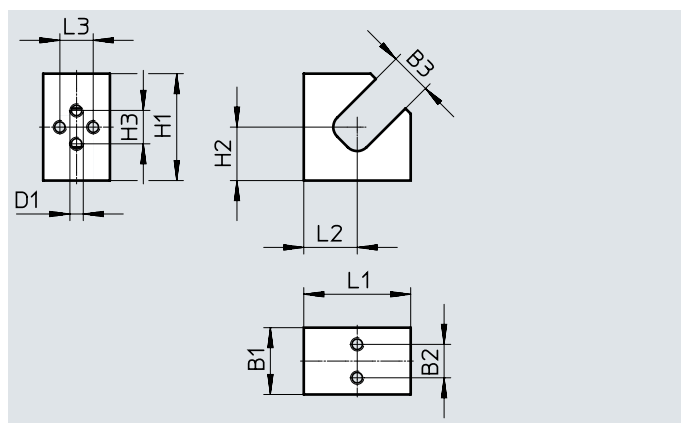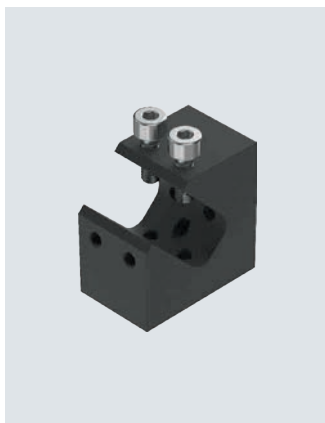

#### Dimensions [mm] and ordering data



| B1 | B2 | B3   | D1 | H1 | H2 | H3 | L1 | L2 | L3 | Weight [g] | Part no. | Type          |
|----|----|------|----|----|----|----|----|----|----|------------|----------|---------------|
| 20 | 10 | 12.5 | M4 | 32 | 16 | 10 | 32 | 16 | 10 | 28         | 8058740  | SBAM-C6-CP-AF |

### Mounting

Type of mounting: With thread,  
clamped

Information on materials: High-alloy  
steel

Note on materials: RoHS-compliant

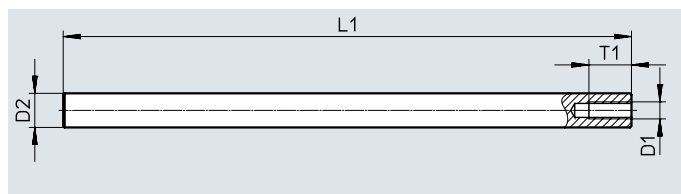

#### Dimensions [mm] and ordering data

| D1 | D2<br>Ø | L1  | T1 | Corrosion resistance class<br>[CRC <sup>1)</sup> ] | Weight [g] | Part no. | Type           |
|----|---------|-----|----|----------------------------------------------------|------------|----------|----------------|
| M6 | 12      | 200 | 15 | 2                                                  | 178        | 8058741  | SBAM-C6-MR-200 |
|    |         | 300 |    |                                                    | 265        | 8058742  | SBAM-C6-MR-300 |

1) Corrosion resistance class CRC 2 to Festo standard FN 940070

Moderate corrosion stress. Indoor applications in which condensation can occur. External visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment.

Accessories – Ordering data

Mounting bracket


SBAM-C6-A

Type of mounting: With through-hole

Information on materials: High-alloy

steel

Note on materials: RoHS-compliant

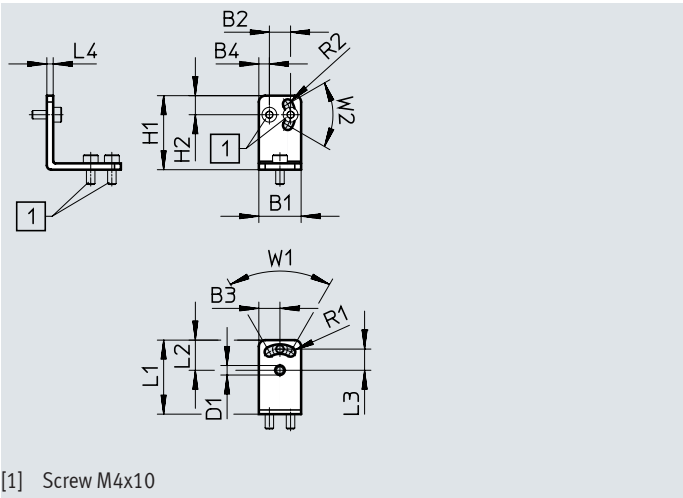


| Dimensions [mm] and ordering data |    |    |    |         |    |    |    |      |    |
|-----------------------------------|----|----|----|---------|----|----|----|------|----|
| B1                                | B2 | B3 | B4 | D1<br>ø | H1 | H2 | L1 | L2   | L3 |
| 20                                | 10 | 10 | 5  | 4.5     | 35 | 9  | 35 | 14.3 | 10 |


| L4 | R1  | R2  | W1  | W2  | Weight<br>[g] | CRC <sup>1)</sup> | Part no. | Type      |
|----|-----|-----|-----|-----|---------------|-------------------|----------|-----------|
| 3  | 2.3 | 2.3 | 60° | 60° | 27            | 2                 | 8031377  | SBAM-C6-A |






1) Corrosion resistance class CRC 2 to Festo standard FN 940070  
Moderate corrosion stress. Indoor applications in which condensation can occur. External visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment.

## Accessories – Ordering data

| Ordering data – Plugs                                                             |                                 |                   |                |                       |
|-----------------------------------------------------------------------------------|---------------------------------|-------------------|----------------|-----------------------|
|                                                                                   | Description                     | PU <sup>(1)</sup> | Part no.       | Type                  |
|  | Plugs for self-assembly         | 1                 | <b>575303</b>  | <b>NECC-L2G4-C1-M</b> |
|                                                                                   | Plugs for self-assembly, 2-pin  | 1                 | <b>575302</b>  | <b>NECC-L2G2-C1</b>   |
|                                                                                   | Plugs for self-assembly, 4-pin  | 1                 | <b>8024782</b> | <b>NECC-L2G4-C1</b>   |
|  | Plugs for self-assembly, 5-pin  | 1                 | <b>575304</b>  | <b>NECC-L2G5-C1</b>   |
|                                                                                   | Plugs for self-assembly, 6-pin  | 1                 | <b>575305</b>  | <b>NECC-L2G6-C1</b>   |
|                                                                                   | Plugs for self-assembly, 8-pin  | 1                 | <b>575306</b>  | <b>NECC-L2G8-C1</b>   |
|  | Plugs for self-assembly, 24-pin | 1                 | <b>575307</b>  | <b>NECC-L2G24-C1</b>  |
|                                                                                   |                                 |                   |                |                       |

1) Packaging unit

| Ordering data – Memory card                                                       |                          |             |                           |                |                         |
|-----------------------------------------------------------------------------------|--------------------------|-------------|---------------------------|----------------|-------------------------|
|                                                                                   | Storage capacity<br>[GB] | Speed class | Max. read speed<br>[MB/s] | Part no.       | Type                    |
|  | 32                       | Class 10    | 20                        | <b>8094425</b> | <b>CAMC-M-MS-G32-G2</b> |
|                                                                                   |                          |             |                           |                |                         |

| Ordering data – Connecting cable                                                    |                                       |                                         |                     |               |                |                                     |
|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------------|---------------------|---------------|----------------|-------------------------------------|
|                                                                                     | Electrical connection 1               | Electrical connection 2                 | Cable length<br>[m] | Weight<br>[g] | Part no.       | Type                                |
|  | Straight plug<br>USB 3.0 type B micro | Straight plug<br>USB 3.0 type A         | 5                   | 282           | <b>8072582</b> | <b>NEBC-U7G10-KS-5-N-S-U5G9</b>     |
|                                                                                     |                                       |                                         |                     |               |                |                                     |
|  | Straight plug, RJ45                   | Straight plug, RJ45                     | 1                   | 87            | <b>8040455</b> | <b>NEBC-R3G4-ES-1-S-R3G4-ET</b>     |
|                                                                                     |                                       |                                         |                     |               |                |                                     |
|  | Straight plug<br>USB 3.0 type B micro | Straight plug<br>USB 3.0 type A         | 15                  | 444           | <b>8093271</b> | <b>NEBC-U7G10-EH-15-N-S-U5G9</b>    |
|                                                                                     | Straight plug<br>USB 3.0 type B micro | Straight plug<br>USB 3.0 type A         | 30                  | 530           | <b>8093272</b> | <b>NEBC-U7G10-EH-30-N-S-U5G9</b>    |
|  | Straight socket                       | Open end                                | 5                   | 160           | <b>8132476</b> | <b>NEBC-H25G8-ES-5-N-B-LE4</b>      |
|                                                                                     |                                       |                                         |                     |               |                |                                     |
|  | Angled socket                         | Straight socket<br>USB 3.0 type B micro | 0.45                | 35            | <b>8093270</b> | <b>NEBC-U7W10-KS-0.5-N-SB-U7G10</b> |

# Festo - Your Partner in Automation



**1 Festo Inc.**  
5300 Explorer Drive  
Mississauga, ON L4W 5G4  
Canada

**Festo Customer Interaction Center**  
Tel: 1 877 463 3786  
Fax: 1 877 393 3786  
Email: customer.service.ca@festo.com



**2 Festo Pneumatic**  
Av. Ceylán 3,  
Col. Tequesquináhuac  
54020 Tlalnepantla,  
Estado de México

**Multinational Contact Center**  
01 800 337 8669  
ventas.mexico@festo.com



**3 Festo Corporation**  
1377 Motor Parkway  
Suite 310  
Islandia, NY 11749

**Festo Customer Interaction Center**  
1 800 993 3786  
1 800 963 3786  
customer.service.us@festo.com



**4 Regional Service Center**  
7777 Columbia Road  
Mason, OH 45040

Connect with us

[www.festo.com/socialmedia](http://www.festo.com/socialmedia)



[www.festo.com](http://www.festo.com)

Subject to change