

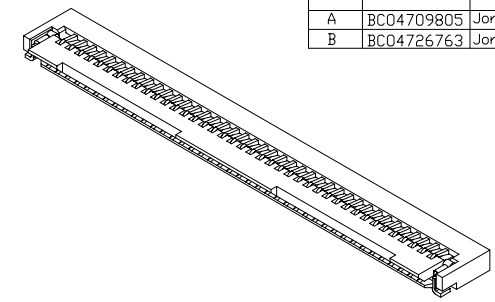
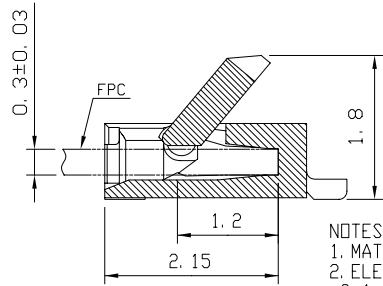
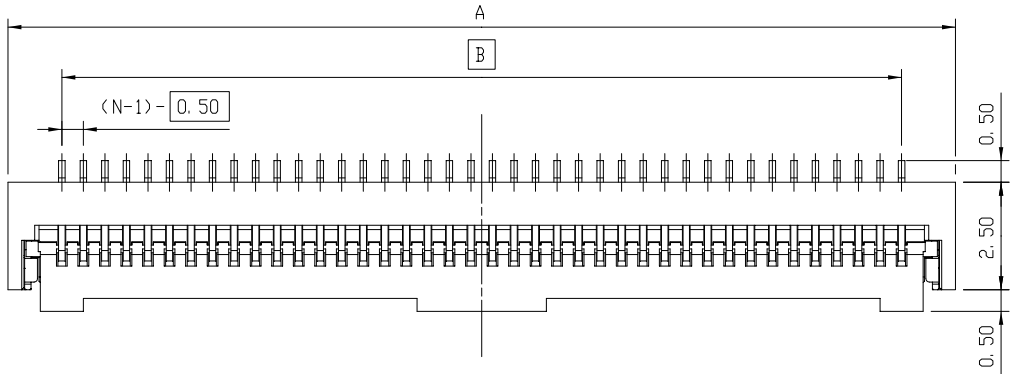


REV.	ECN. NO.	APPD.
A	BC04709805	Jong Tseng
B	BC04726763	Jong Tseng




- NOTES:
- MATERIAL SEE TABLE.
 - ELECTRICAL CHARACTERISTICS:
 - VOLTAGE : 50V DC MAX.
 - CURRENT RATING : 0.5 AMPERE MAXIMUM
 - LOW LEVEL CONTACT RESISTANCE : 100 MILLIOHMS MAXIMUM
 - INSULATION RESISTANCE : 500 MEGOHMS MINIMUM
 - MECHANICAL CHARACTERISTICS:
 - DURABILITY: MINIMUM 20 MATING/UNMATING CYCLES
 - ENVIRONMENTAL CHARACTERISTICS:
 - OPERATING TEMPERATURE : -30°C TO +85°C
 - STORAGE TEMPERATURE : -40°C TO +85°C
 - ▽: CRITICAL DIMENSION.
 - FPC THICKNESS : 0.30 ± 0.03 mm

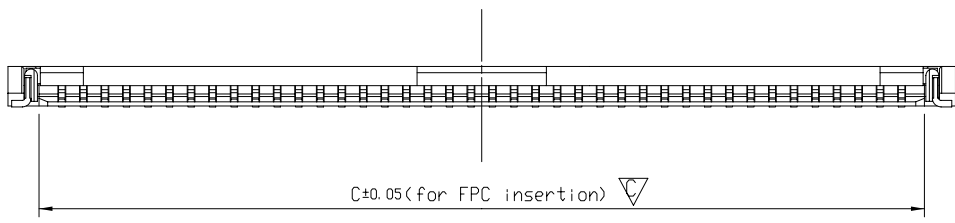

PART NUMBER
 WBF3**2*-F06TR
 PIN NUMBER 6: GOLD PLATING
 L: TIN/LEAD PLATING

PART NO.	NUMBER OF CONTACTS(N)	A	B	C	REMARK
WBF3402*-F06TR	40	22.00	19.50	20.56	
WBF3322*-F06TR	32	18.00	15.50	16.56	
WBF3302*-F06TR	30	17.00	14.50	15.56	
WBF3272*-F06TR	27	15.50	13.00	14.06	
WBF326*-F06TR	26	15.00	12.50	13.56	
WBF3242*-F06TR	24	14.00	11.50	12.56	
WBF3202*-F06TR	20	12.00	9.50	10.56	
WBF3092*-F06TR	9	6.50	4.00	5.06	
WBF3062*-F06TR	6	5.00	2.50	3.56	

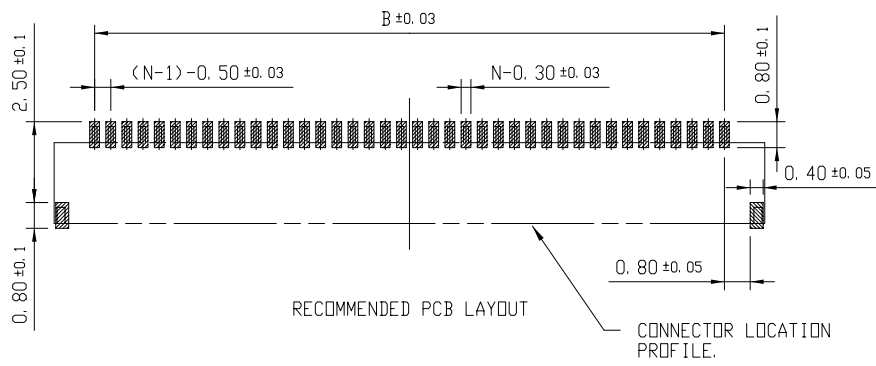

ITEM	DESCRIPTION	Q' TY	MATERIAL	FINISH	REMARK
4	COVER	1	THERMOPLASTIC UL 94V-0	MOLDED COLOR; BLACK	
3	HOUSING	1	THERMOPLASTIC UL 94V-0	MOLDED COLOR; IVORY	
2	PAD	2	COPPER ALLOY	NICKEL UNDERPLATING 50~100μ' OVERALL. TIN/LEAD PLATING 50~200μ' OVERALL.	
1	CONTACT	N	COPPER ALLOY	NICKEL UNDERPLATING 50~100μ' OVER ALL. TIN/LEA OR GOLD PLATING OVERALL.	

UNITS	MM	NAME (INTENDED USE)	FOXCONN
X ±	X* ± 1°	CUSTOMER	HON HAI PRECISION IND. CO., LTD. TAIPEI, TAIWAN, R. D. C.
.X ± 0.25	.X* ±	PART NO. (INTENDED USE)	TITLE:
.XX ± 0.15	.XX* ±	WBF3**2*-F06TR	FPC 0.5MM PITCH CONNECTOR (0.9MM HEIGHT)
.XXX ±	.XXX* ±	APPD: Jong Tseng 10/23' 04	DWG NO.:
		CHKD: Tim Chen 10/23' 04	357-0000-1006
		DR: X. G. SUN 10/23' 04	SCALE SHEET REV.
			1/1 B

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF HON HAI PRECISION IND. CO., LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF HON HAI PRECISION IND. CO., LTD.